

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST QUARTER Corner of Section 30, Township 106, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY

At the corner location shown on the sketch:

- On 5/22/2025 found a 8"X4" stone (see Statement of Evidence)  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 6/10/2025 placed a 5/8" iron with seal #43844 over stone.  
DATE

### SKETCH OF REFERENCE TIES

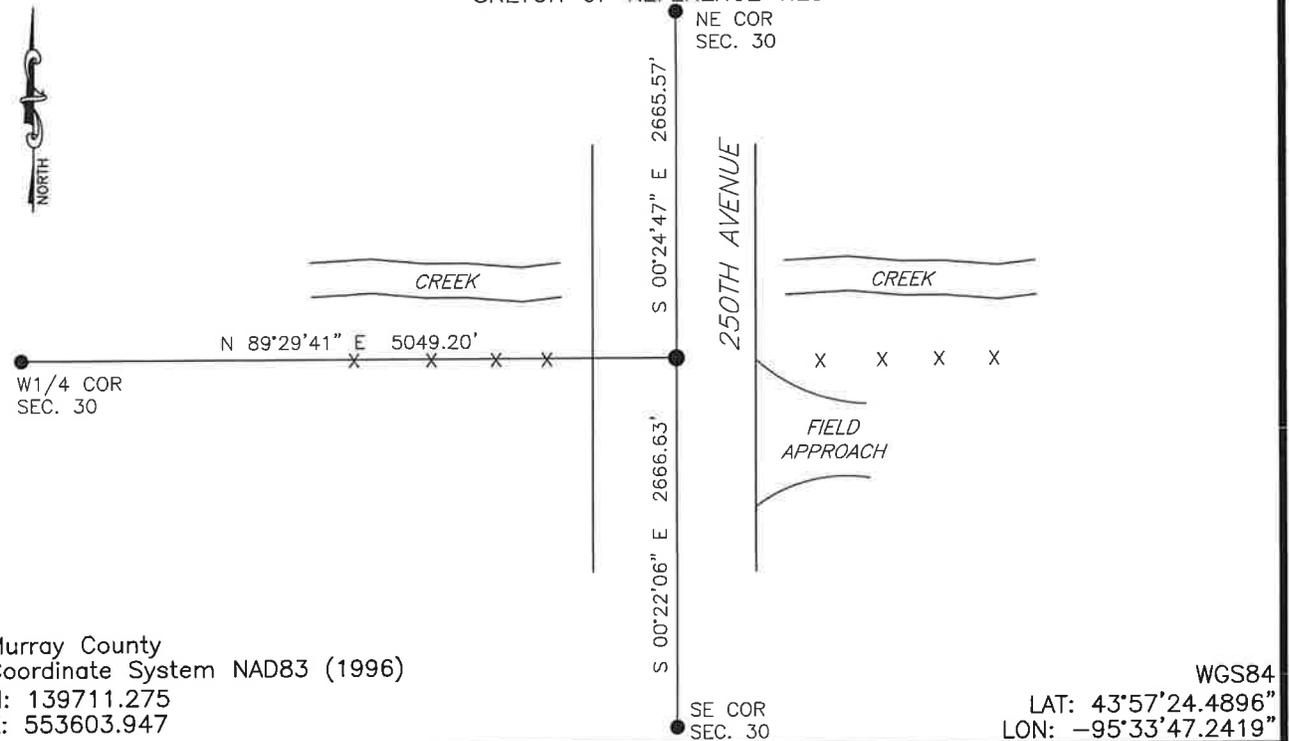

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

*Daniel L. Bueltel* 1/16/2026  
DATE  
 Daniel L. Bueltel  
 License No. 43844

**MURRAY COUNTY RECORDER**  
*Karen Brown*  
 JAN 20 2026

Statement of Evidence

EAST QUARTER CORNER SECTION 30, T106N, R39W OF THE 5th P.M.

September 1858 W.J. Neely surveyed the east township line.

July of 1861 J.W. Myers surveyed the north, south, and west township lines.

August of 1861 Wellman & Smoot subdivided the township.

November 3, 1926, survey shows that the corner was established midway between the section corners, but does not note what was set.

May 22, 2025 Bueltel-Moseng Land Surveying dug with backhoe and found an 8"x4" field stone 1 foot below road surface. Stone location fits distances from 1926 survey. Lowered stone and set a 5/8" iron with seal #43844 along the west side of stone.

June 10, 2025 Bueltel-Moseng Land Surveying set a 5/8" iron with seal #43844 over the found stone.