

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter Corner of Section 7, Township 106, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of Murray

At the corner location shown on the sketch:

- On 8/26/2025 found a 3/4" iron down 4.5'±.
- left monument as found, lowered monument, removed monument (explain)
- On 10/13/2025 placed a 5/8" iron with seal #43844 over top of the iron.

SKETCH OF REFERENCE TIES

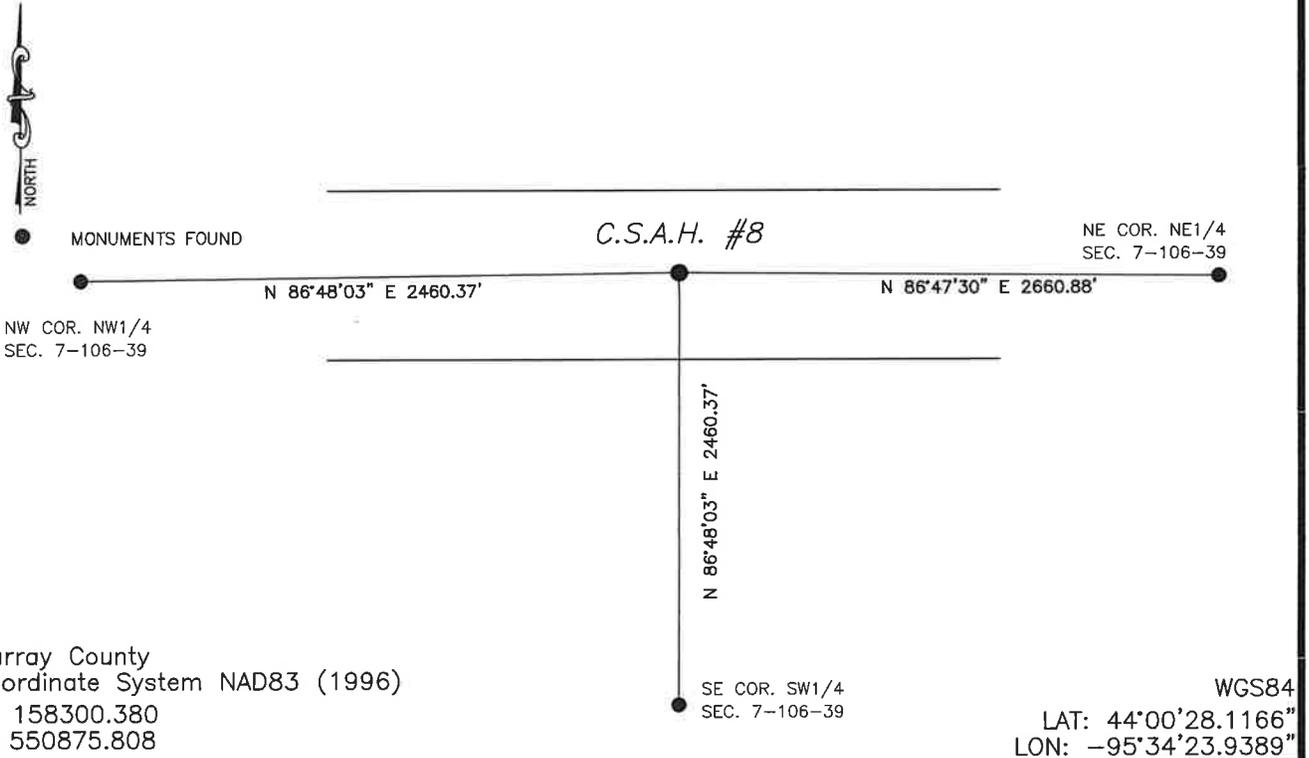

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature]

Daniel L. Bueltel
License No. 43844

10/21/2025
DATE

OCT 24 2025

[Signature]

MURRAY COUNTY RECORDER

Statement of Evidence

NORTH QUARTER CORNER SECTION 7, T106N, R39W OF THE 5th P.M.

In September 1858, W.J. Neely surveyed the east township line.

In July of 1861, J.W. Myers surveyed the north, south, and west township lines.

In August of 1861, Wellman & Smoot subdivided the township.

On May 1, 1988 Murray County dug an 8'x8'x3' deep hole and found nothing.

County Records dated May 25, 2012 note an iron pin at the corner being 1' south of the road centerline.

County records dated May 14, 2013 note Zieske Land Surveying found an iron monument at the corner.

On July 30, 2025 Bueltel-Moseng Land Surveying found a $\frac{3}{8}$ " iron at the corner, removed and dug with a backhoe and found a $\frac{3}{4}$ " squarer iron down 4.5'±, probed along side the iron and did not hit anything. Accepted the iron as the corner.

Returned on October 13, 2025 and set a $\frac{5}{8}$ " iron with seal #43844 over top of the iron.