

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 17, Township 107, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of Murray

At the corner location shown on the sketch:

- On 5/7/2025 found a 3/8" iron at the surface of the road, iron is 1'± east of the road center line.  
 left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_

SKETCH OF REFERENCE TIES

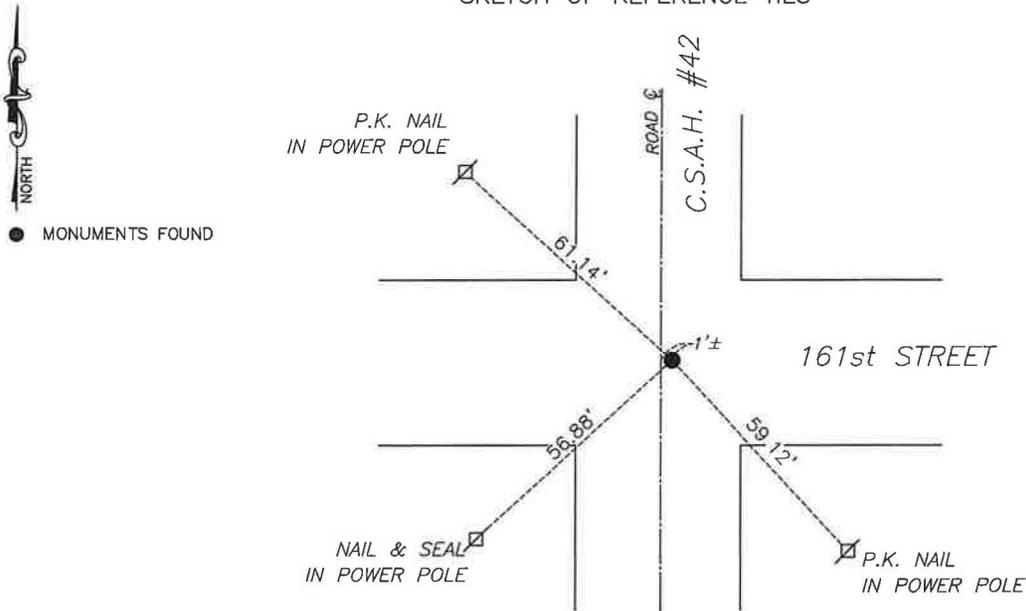

Murray County  
 Coordinate System NAD83 (1996)  
 N: 184606.657  
 E: 558828.101

WGS84  
 LAT: 44°04'47.6821"  
 LON: -95°32'34.1620"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

*Daniel L. Buettel*      1/16/2026  
 Daniel L. Buettel      DATE  
 License No. 43844

**MURRAY COUNTY RECORDER**

*Karen Brown*

JAN 20 2026

## Statement of Evidence

**Northeast Corner Section 17, T107N, R39W of the 5th P.M.**

In October of 1857, J.W. Myers surveyed the east township line.

In July of 1861 J.W. Myers surveyed the north, south, and west township lines.

In September of 1861, L. Brockmann subdivided the township.

A survey by J.W. Woolstencroft dated May 22, 1901 notes a stone and pits at the corner.

County records dated April 13, 1978 notes they dug a 5'x6'x6' deep hole at the location of the corner and found nothing.

C.S.A.H. #42 plans from May of 1999 note the corner at station 3+222.686.

County records dated May of 2017 notes a No. 4 rebar was located at the corner.

A survey by Jesse Zeig, L.S. #44996, dated December 2019 notes a  $\frac{1}{4}$ " rebar located at the corner.

In September of 2020 Westwood Professional Services located a No. 4 rebar at the corner.

On May 7, 2025 Bueltel-Moseng Land Surveying located a  $\frac{3}{8}$ " iron at the corner, corner fell  $1' \pm$  east of the center line of C.S.A.H. #42. Accepted the iron as the corner.