

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 31, Township 107, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY


At the corner location shown on the sketch:

On 7/10/2025 found a 5/8" iron with seal #11943, probed beside and hit the stone monument beneath.

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_

## SKETCH OF REFERENCE TIES

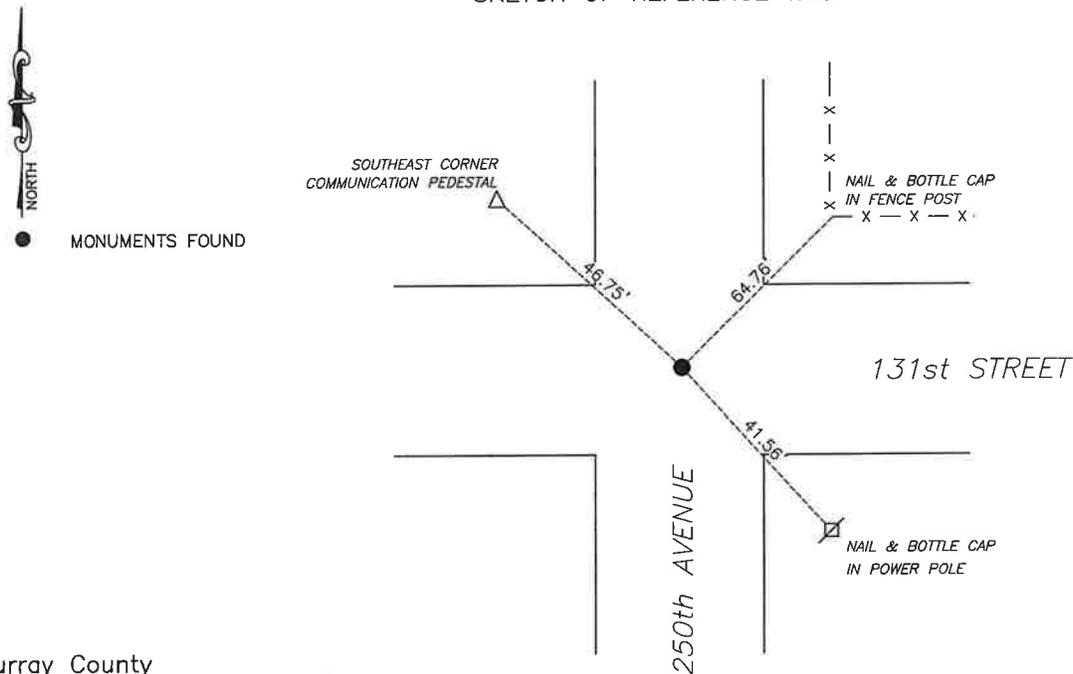

Murray County  
Coordinate System NAD83 (1996)  
N: 168757.054  
E: 553605.318

WGS84  
LAT: 44°02'11.3076"  
LON: -95°33'46.2412"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

  
Daniel L. Bueltel  
License No. 43844

10/21/2025  
DATE

OCT 24 2025



MURRAY COUNTY RECORDER

### Statement of Evidence

Northeast Corner Section 31, T107N, R39W, of the 5th P.M.

In October of 1857 J.W. Meyers surveyed the east boundary of the township.

In July of 1861, J.W. Myers surveyed the remaining township lines.

In September of 1861, L. Brockmann subdivided the township.

On May 15, 1975 Del Thraen located a concrete monument at the corner.

County records dated October 11, 1985 show a field stone located at the corner and a broken concrete monument placed over top of the stone.

On March 7, 2005 Zieske Land Surveying located an iron stake with a cap at the corner.

On August 27, 2020 Westwood Professional Services located an iron with an unreadable cap.

On July 10, 2025 Bueltel-Moseng Land Surveying located a  $\frac{5}{8}$ " iron with seal #11943 at the corner, probed along side the iron and hit the stone monument beneath. Accepted the iron as the corner.