

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 36, Township 107, Range 40, 5TH P.M.

STATE OF MINNESOTA, County of Murray


At the corner location shown on the sketch:

On 7/30/2025 found a 5/8" iron with seal #11943, probed along side the iron
DATE and hit the concrete monument.

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

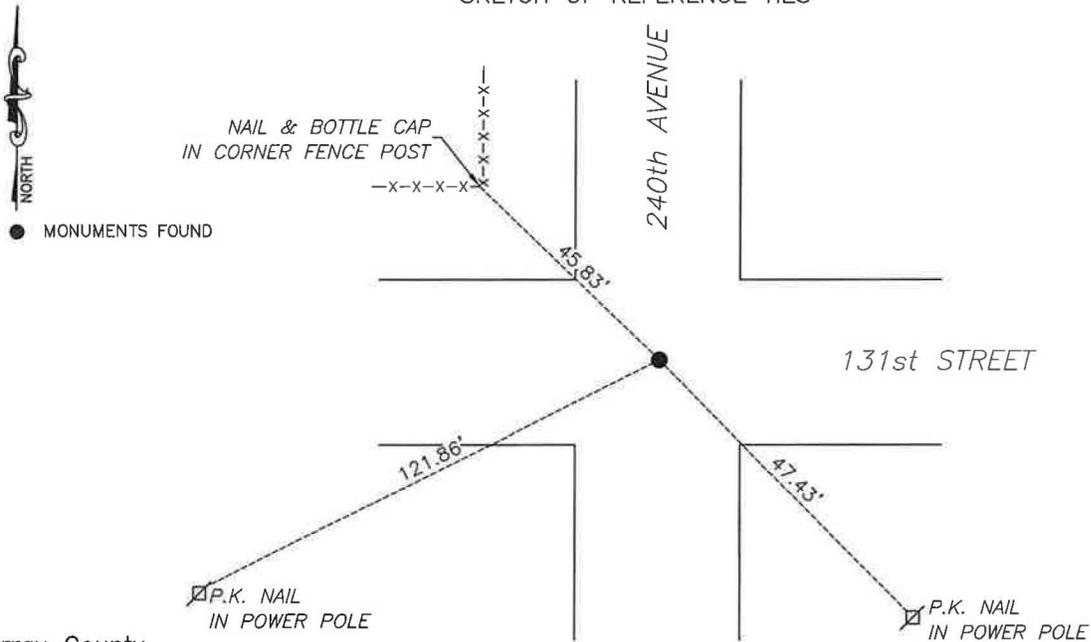

Murray County
Coordinate System NAD83 (1996)
N: 168731.977
E: 548378.422

WGS84
LAT: 44°02'11.1814"
LON: -95°34'57.7884"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Daniel L. Bueltel
License No. 43844

1/16/2024
DATE

MURRAY COUNTY RECORDER

JAN 20 2026

Statement of Evidence

Northeast Corner Section 36, T107N, R40W of the 5th P.M.

In June of 1861 J.W. Myers surveyed the township lines.

In July of 1861, L. Brockmann subdivided the township.

A survey of section 36 dated June 29, 1932 notes the old corner was found and a concrete monument was set in place for the corner.

On May 15, 1975 Highway Department records show a concrete monument 12" below grade.

In September 2020 Westwood Professional Services found an iron with cap LS 11943.

On July 30, 2025 Bueltel-Moseng Land Surveying found a $\frac{5}{8}$ " iron with seal #11943, probed along side the iron and hit the concrete monument below.